


KAWAI
MIDI PATCHBAY MAV-8
Owner's Manual

Panel Location Guide

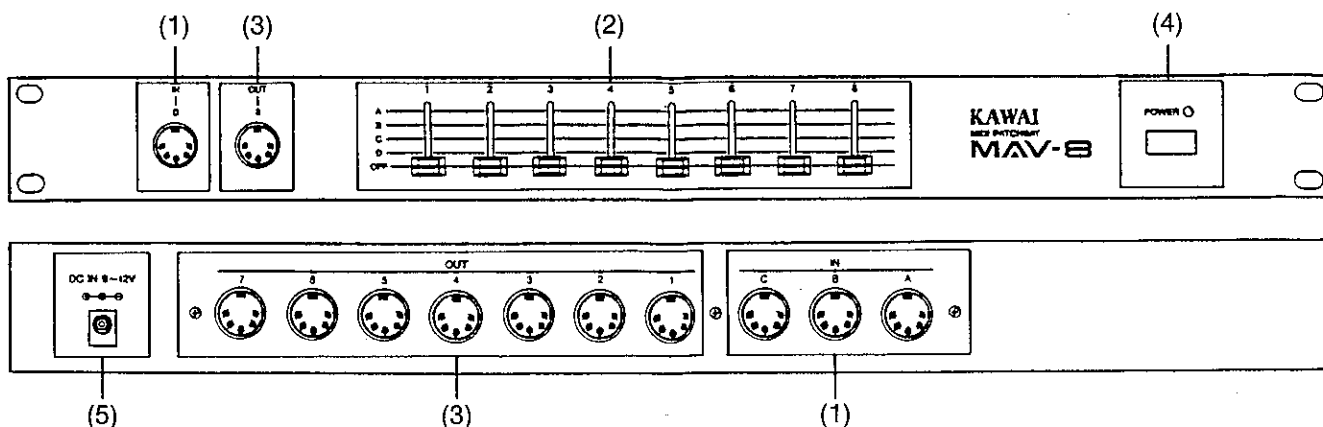

Controls

- (1) MIDI IN connectors A-D
These accept signals from the MIDI OUT and MIDI THRU connectors of other MIDI instruments. Up to four instruments can be connected.
- (2) Selectors 1-8
These route the signals from the MIDI IN connectors A-D to the MIDI OUT connectors 1-8. The fifth position, OFF, cuts all output to the connector — that is, makes it mute.
- (3) MIDI OUT connectors 1-8
These transmit signals to the MIDI IN connectors on up to eight MIDI instruments.
Note: It is also possible to connect more instruments by daisy-chaining them through the MIDI THRU connectors on these eight instruments.
- (4) POWER switch and LED
The LED in the switch lights when the unit is operational.
- (5) AC IN jack
This connects to the AC power adapter.

Care and Maintenance

- Connect the AC adapter supplied with the instrument to a power outlet with a voltage matching the one listed rating on the adapter.
- Avoid continued use or storage in the presence of the following environmental factors as they may contribute to faulty operation or breakdowns:
 - * Exposure to direct sunlight
 - * Excessive heat or humidity
 - * Sand or dust
 - * Excessive vibration
- Do not force the selectors as excessive force can damage the contacts.
- Do not change selector settings or cut the power while the unit is transmitting as transients may affect other MIDI instruments, resulting in stuck notes or other problems.
- Always turn the MAV-8 on first so as to avoid sending improper signals to other MIDI instruments.

Specifications

Controls

Input Selectors

1-8 (Five positions: A/B/C/D/OFF)

Jacks

MIDI IN

A-C (Rear panel), D (Front panel)

MIDI OUT

1-7 (Rear panel), 8 (Front panel)

Dimensions

482 × 118 × 44 mm (19 × 4¼ × 1¾")
(fits EIA 1U rack)

Weight

1.7 kg 3.8 lbs.

Accessories

AC adapter

Power supply

AC adapter

Current consumption

50 mA